

Pitch:2.54X2.54mm(0.1"X0.1") Box Header With Lock Right Angle Type





MXCONN
MMHB220 Series

Specifications

Current Rating: 3.0 Ampere
Insulation Resistance: 1000MΩ Min
Dielectric Withstanding: 600V AC
Contact Resistance: 20mΩ Max
Operating Temperature: -40°C to +105°C

Materials

Contact Material: Brass
Insulation Material: Polyester,UL 94V-0
PBT

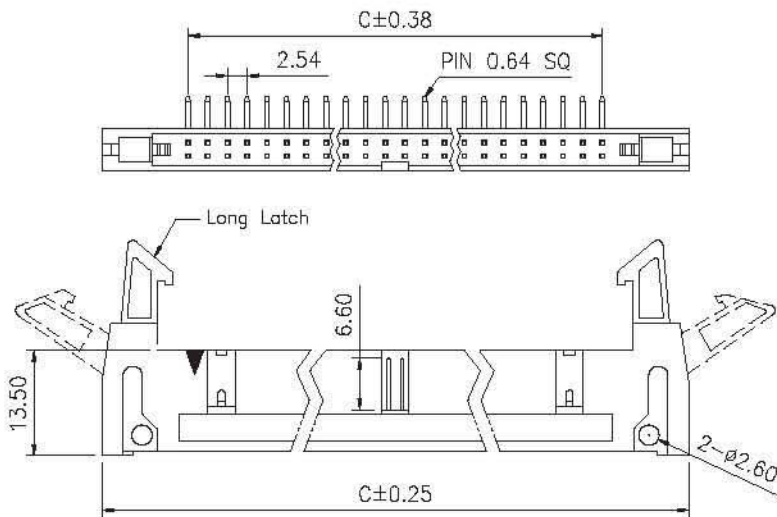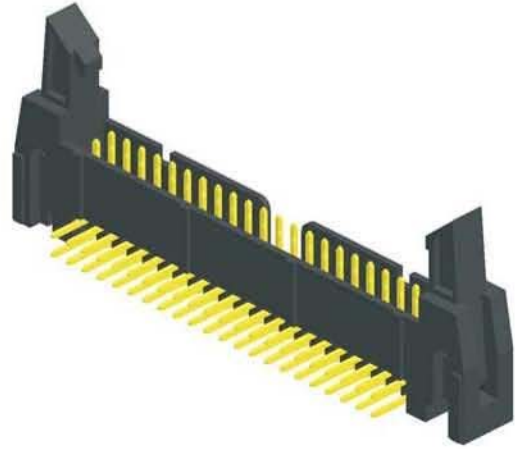

No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information	
	C	D		C	D		C	D		C	D
05	10.16	32.00	10	22.86	44.70	17	40.64	62.48	32	78.74	100.58
06	12.70	34.54	12	27.94	49.78	20	48.26	70.10			
07	15.24	37.08	13	30.48	52.32	25	60.96	82.80			
08	17.78	38.62	15	35.56	57.40	30	73.66	95.50			

Ordering Information

MMHB220 - XX	XX A001.
No. of Pins per Row	Standard Plating
05,06,07,08	02 :Gold Flash
10,12,13,15	Selective Plating
17,20,25,30,32	01 :Tin
	05 :Gold Flash / Tin

* Standard Packaging:Box

Due to technical progress,all designs,Specifications and components are subject to change without notice