

Pitch:1.00X1.00mm(0.039")
Dual Rows S.M.T Type

MXCONN
MMCC2XX Series







Specifications

Current Rating: 1.0 Ampere
Insulation Resistance: 1000MΩ Min
Dielectric Withstanding: 300V AC
Contact Resistance: 20mΩ Max
Operating Temperature: -40 °C to +105 °C

Materials

Contact Material: Brass
Insulation Material: Polyester,UL 94V-0
LCP

Mating with

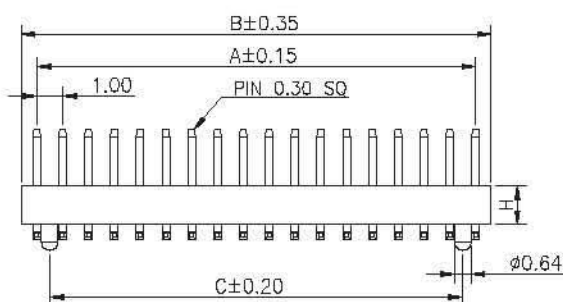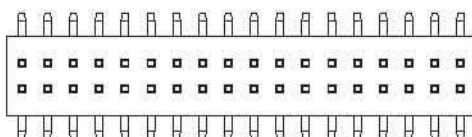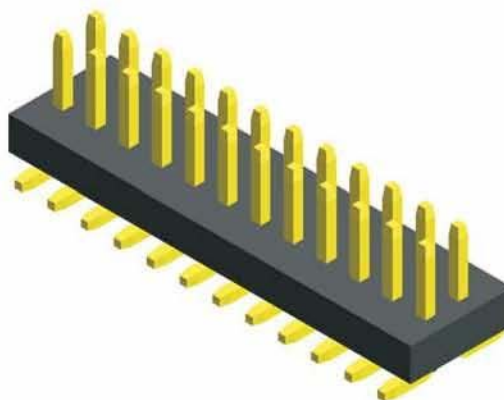

No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information			No. of Pins/Row	Dimension Information		
	A	B	C		A	B	C		A	B	C		A	B	C
02	1.00	2.00	-	12	11.00	12.00	10.00	22	21.00	22.00	20.00	32	31.00	32.00	30.00
03	2.00	3.00	-	13	12.00	13.00	11.00	23	22.00	23.00	21.00	33	32.00	33.00	31.00
04	3.00	4.00	-	14	13.00	14.00	12.00	24	23.00	24.00	22.00	34	33.00	34.00	32.00
05	4.00	5.00	3.00	15	14.00	15.00	13.00	25	24.00	25.00	23.00	35	34.00	35.00	33.00
06	5.00	6.00	4.00	16	15.00	16.00	14.00	26	25.00	26.00	24.00	36	35.00	36.00	34.00
07	6.00	7.00	5.00	17	16.00	17.00	15.00	27	26.00	27.00	25.00	37	36.00	37.00	35.00
08	7.00	8.00	6.00	18	17.00	18.00	16.00	28	27.00	28.00	26.00	38	37.00	38.00	36.00
09	8.00	9.00	7.00	19	18.00	19.00	17.00	29	28.00	29.00	27.00	39	38.00	39.00	37.00
10	9.00	10.00	8.00	20	19.00	20.00	18.00	30	29.00	30.00	28.00	40	39.00	40.00	38.00
11	10.00	11.00	9.00	21	20.00	21.00	19.00	31	30.00	31.00	29.00				

Ordering Information

MMCC2	XX	-	XX	XX	X	XXX	C1BC
	Height Option (H)		No. of Pins per Row	Standard Plating	A :W/O POST B :WITH OPST		Pin Length (C / D / E)
	09 :H=1.00		02 ~40	02 :Gold Flash Selective Plating		MMCC209 ...A	007 :C=2.20,D=1.50,E=6.00
	10 :H=1.50			01 :Tin		MMCC209 ...B	001 :C=1.90,D=1.30,E=4.60
	11 :H=1.20					MMCC210 ...A	007 :C=1.90,D=1.80,E=5.20
						MMCC210 ...B	001 :C=1.90,D=1.90,E=6.20
						MMCC211 ...A	001 :C=2.00,D=1.60,E=4.80
						MMCC211 ...B	001 :C=2.00,D=1.60,E=4.80
							Selective Length Custom Length Available

*Standard Packaging:Tube