

Pitch:2.54mm(0.1")
Pin Header Dual Rows Straight Type

MXCONN
MMHA213 Series







2.54 Male Dip Type

Specifications

Current Rating: 3.0 Ampere
Insulation Resistance: 1000MΩ Min
Dielectric Withstanding: 600V AC
Contact Resistance: 20mΩ Max
Operating Temperature: -40°C to +105°C

Materials

Contact Material: Phosphor Bronze
Insulation Material: Polyester,UL 94V-0
LCP

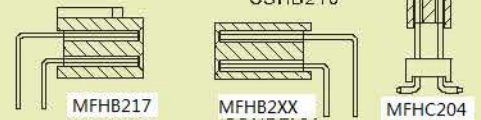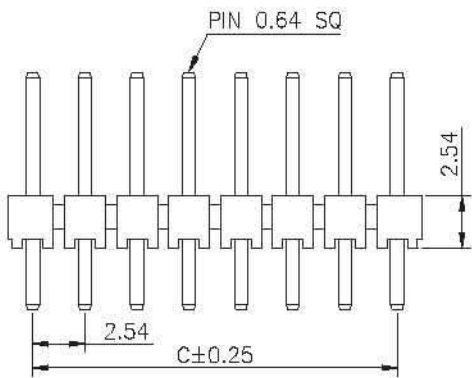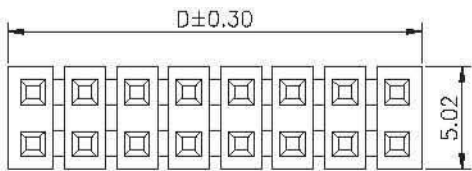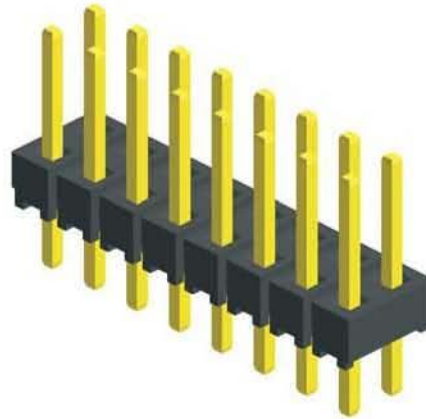

No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information	
	C	D		C	D		C	D		C	D
02	2.54	4.96	10	22.86	25.28	18	43.18	45.60	26	63.50	65.92
03	5.08	7.50	11	25.40	27.82	19	45.72	48.14	27	66.04	68.46
04	7.62	10.04	12	27.94	30.36	20	48.26	50.68	28	68.58	71.00
05	10.16	12.58	13	30.48	32.90	21	50.80	53.22	29	71.12	73.54
06	12.70	15.12	14	33.02	35.44	22	53.34	55.76	30	73.66	76.08
07	15.24	17.66	15	35.56	37.98	23	55.88	58.30			
08	17.78	20.20	16	38.10	40.52	24	58.42	60.84			
09	20.32	22.74	17	40.64	43.06	25	60.96	63.38			

Ordering Information

MMHA213 -	XX	XX	A	XXX
	No. of Pins per Row	Standard Plating		Pin Length (A / B)
	02~30	02 :Gold Flash		001 : A=6.00,B=3.00
		Selective Plating		005 : A=4.95,B=3.45
		01 :Tin		Selective Length
		05 :Gold Flash / Tin		Custom Length Available

* Standard Packaging:Box

Due to technical progress,all designs,Specifications and components are subject to change without notice