

Pitch:5.08mm(0.20")
Power Socket Single Row Dip Type


MXCONN
MFMA110 Series

Specifications



Current Rating: 7.9 Ampere
Insulation Resistance: 1000MΩ Min
Dielectric Withstanding: 1000V AC/DC
Contact Resistance: 30mΩ Max
Operating Temperature: -40°C to +105°C

Materials


Contact Material: Phosphor Bronze
Insulation Material: Polyester,UL 94V-0
LCP

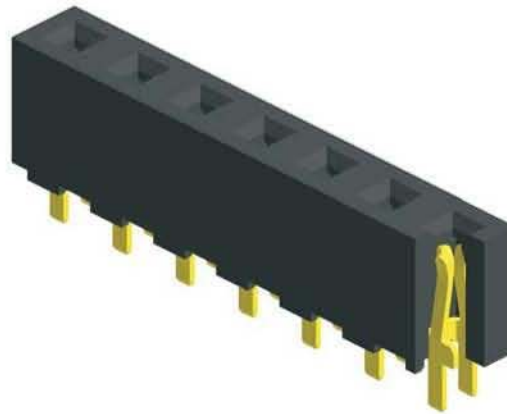





Mating with



MMMA101



MMMB101

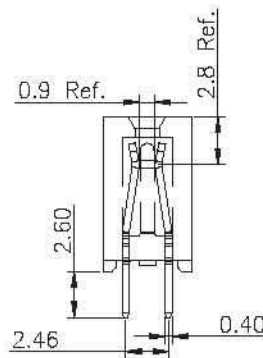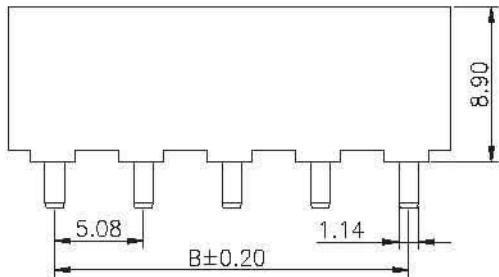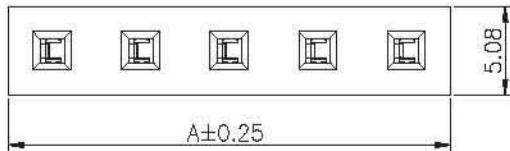

PS:Suggested Mating Pin Length:3.8~8.5mm

No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information		No. of Pins/Row	Dimension Information	
	A	B		A	B		A	B		A	B
02	10.16	5.08	08	40.64	35.56	14	71.12	66.04	20	101.60	96.52
03	15.24	10.16	09	45.72	40.64	15	76.20	71.12			
04	20.32	15.24	10	50.80	45.72	16	81.28	76.20			
05	25.40	20.32	11	55.88	50.80	17	86.36	81.28			
06	30.48	25.40	12	60.96	55.88	18	91.44	86.36			
07	35.56	30.48	13	66.04	60.96	19	96.52	91.44			

Ordering Information

MFMA110 - **XX** **XX** A001
 No. of Pins per Row **02~20**
 Standard Plating
02 :Gold Flash
 Selective Plating
01 :Tin
05 :Gold Flash / Tin

*Standard Packaging:Tube