

Pitch:2.00mm (0.079")
Wire To Board Single Row DIP Type







Materials

Contact Material: Brass
Insulator Material: PA66
Flame Retardant Grade: UL 94V-0

Specifications

Current Rating: 2.0 A
Voltage Rating: 250 V
Insulation Resistance: 1000MΩ min
Withstand Voltage: 1000V AC
Contact Resistance: 20mΩ max
Operating Temperature: -25°C~85°C

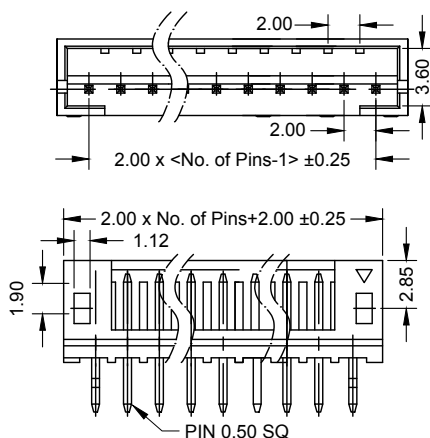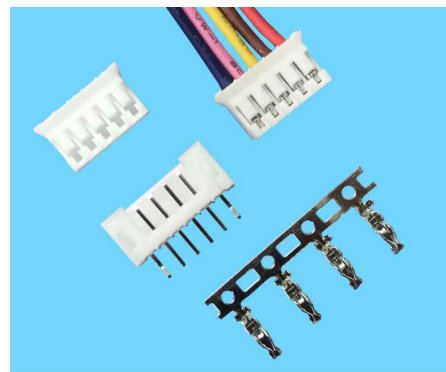

Recommended P.C.Board Layout

Ordering Information

MWFA102 - XX XX A001 X X
 No. of Pins 02 ~ 16
 Standard Plating 01=Tin 02=Gold Flash ...
 Material A=PBT B=PA6T C=LCP ...
 Colour 1=Black 2=White ...

Pitch:2.00mm (0.079")
Wire To Board Dual Row DIP Type







Materials

Contact Material: Brass
Insulator Material: PA66
Flame Retardant Grade: UL 94V-0

Specifications

Current Rating: 2.0 A
Voltage Rating: 250 V
Insulation Resistance: 1000MΩ min
Withstand Voltage: 1000V AC
Contact Resistance: 20mΩ max
Operating Temperature: -25°C~85°C

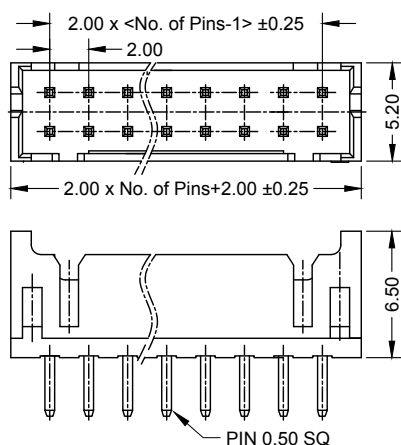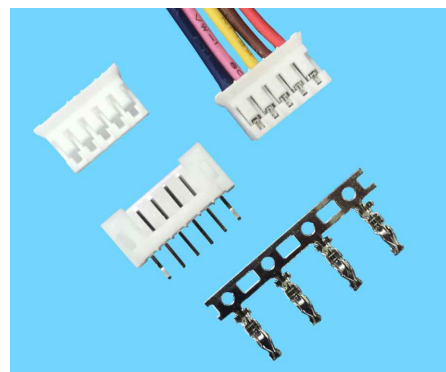

Recommended P.C.Board Layout

Ordering Information

MWFA206 - XX XX A003 X X
 No. of Pins 02 ~ 20
 Standard Plating 01=Tin 02=Gold Flash ...
 Material A=PBT B=PA6T C=LCP ...
 Colour 1=Black 2=White ...